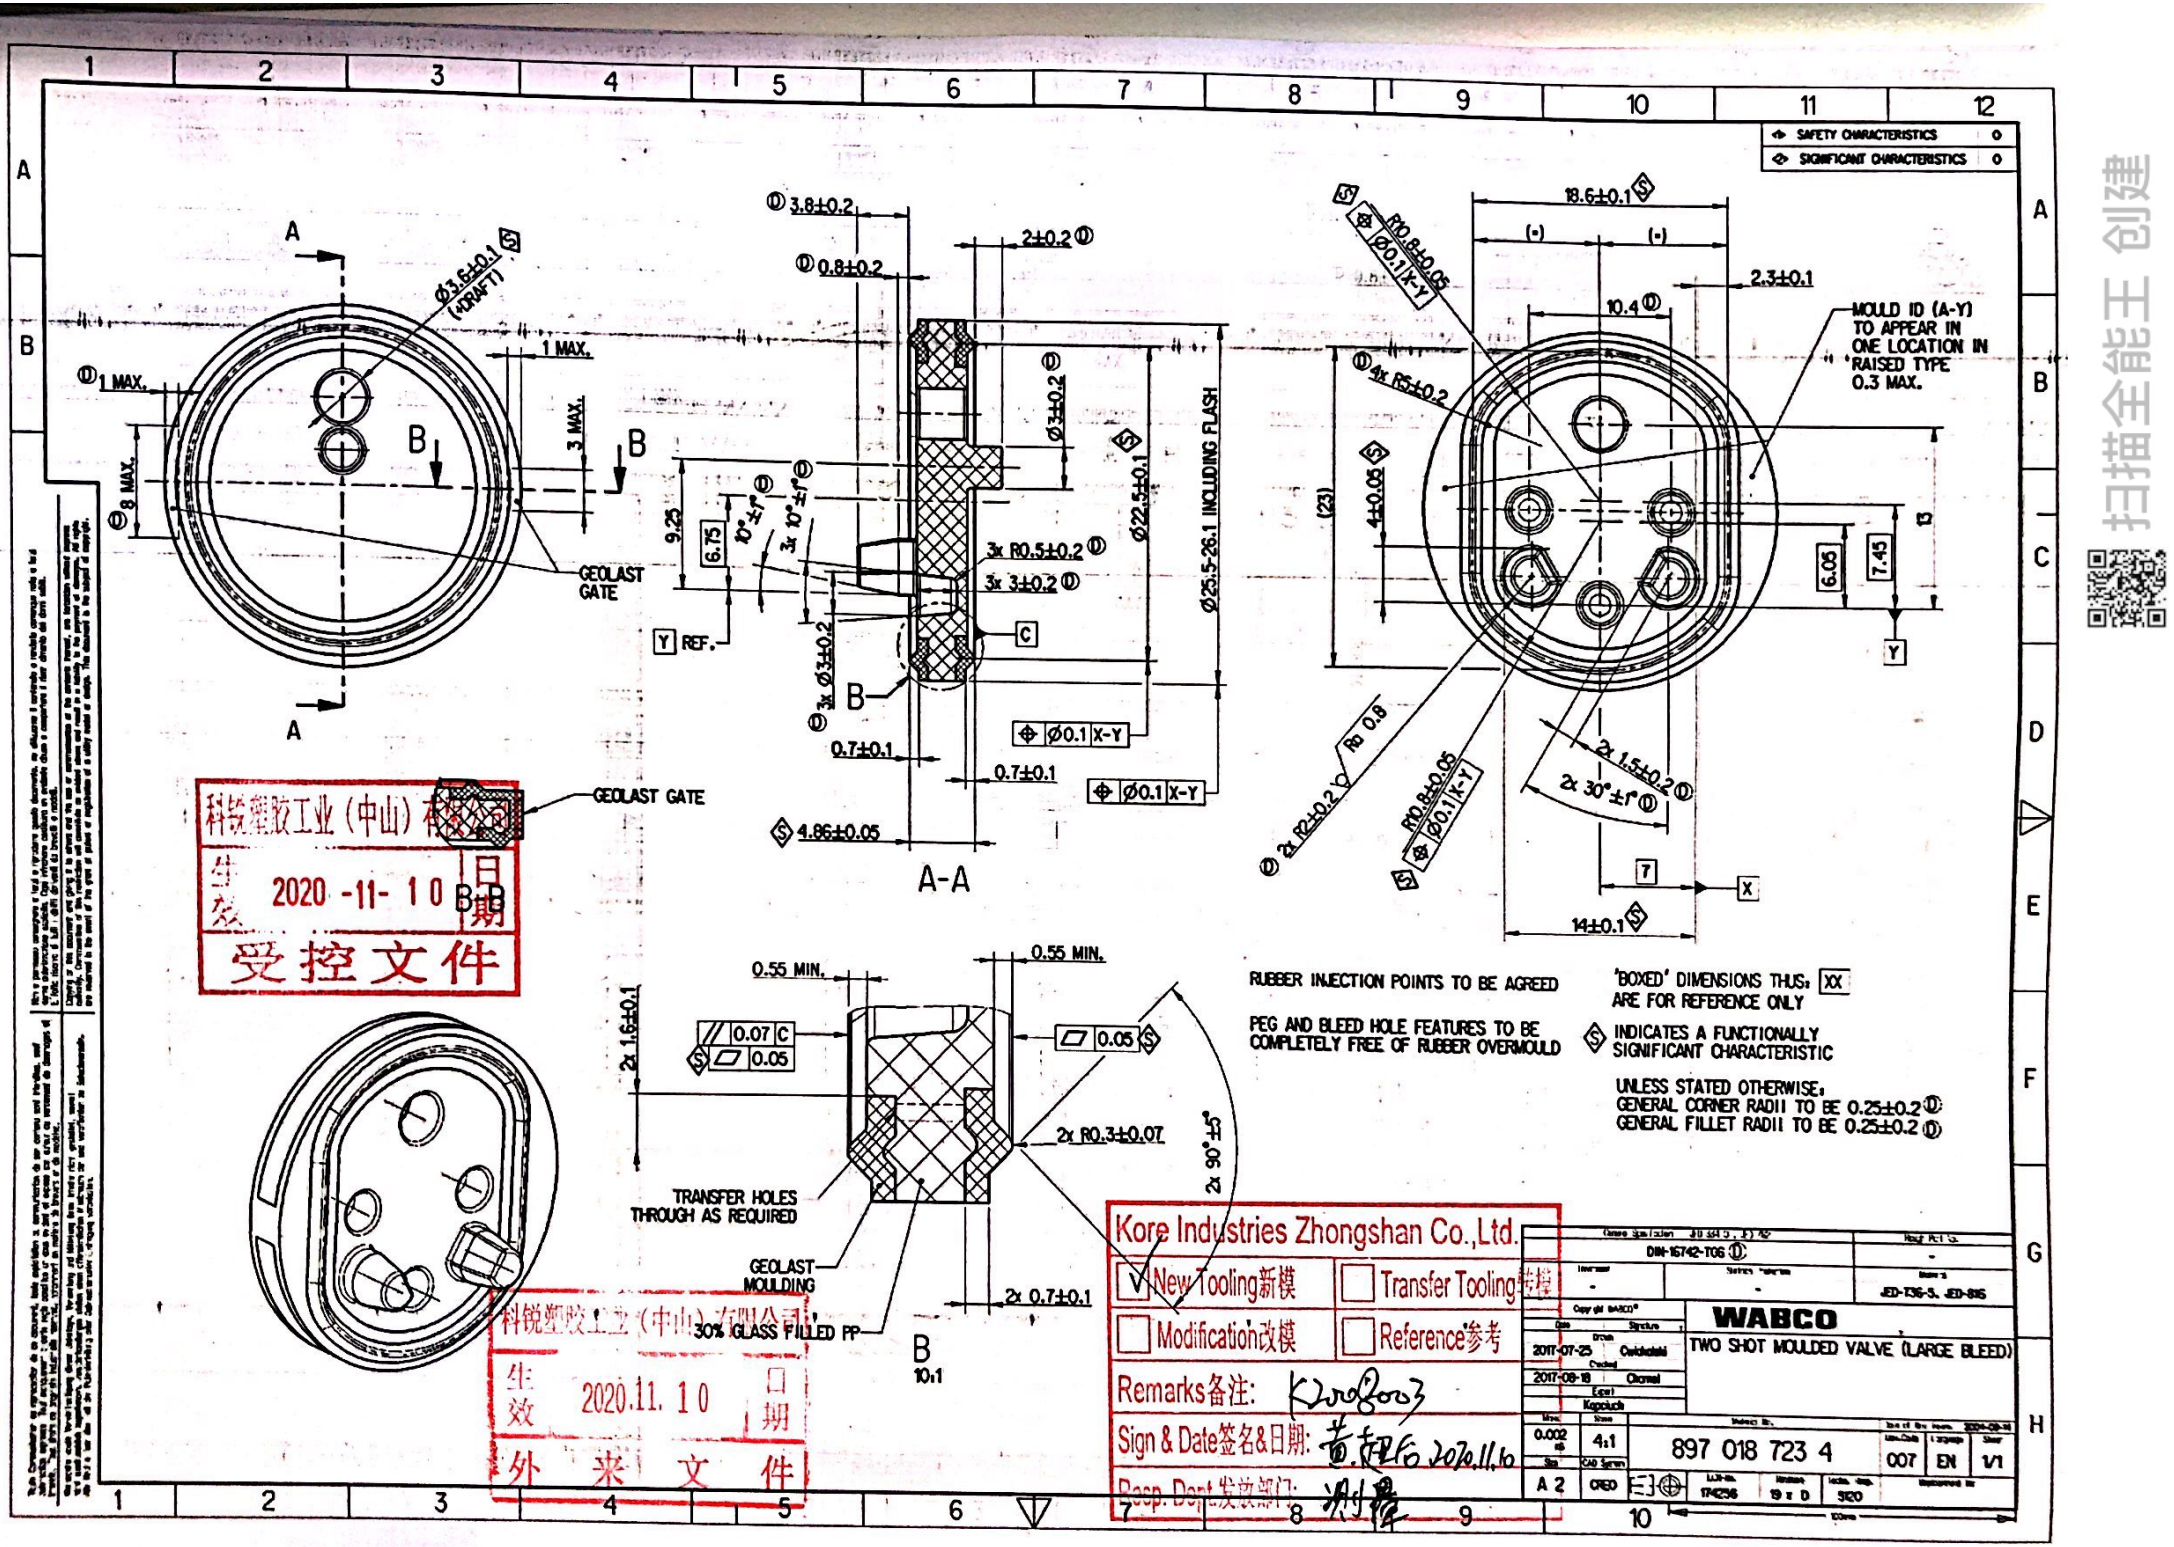
SAFETY CHARACTERISTICS
SIGNIFICANT CHARACTERISTICS
GEOLAST GATE
A-A
B
10:1
MOULD ID (A-Y) TO APPEAR IN ONE LOCATION IN RAISED TYPE 0.3 MAX.
GEOLAST GATE
TRANSFER HOLES THROUGH AS REQUIRED
GEOLAST MOULDING
30% GLASS FILLED PP
RUBBER INJECTION POINTS TO BE AGREED
PEG AND BLEED HOLE FEATURES TO BE COMPLETELY FREE OF RUBBER OVERMOULD
'BOXED' DIMENSIONS THUS: XX ARE FOR REFERENCE ONLY
INDICATES A FUNCTIONALLY SIGNIFICANT CHARACTERISTIC
UNLESS STATED OTHERWISE,
GENERAL CORNER RADII TO BE 0.25±0.2
GENERAL FILLET RADII TO BE 0.25±0.2
科锐塑胶工业(中山)有限公司
生效日期 2020-11-10
受控文件
Kore Industries Zhongshan Co.,Ltd.
New Tooling新模
Transfer Tooling转模
Modification改模
Reference参考
Remarks备注:
Sign & Date签名&日期:
Resp. Dept.发放部门:
DIN-16742-TG6
JED-T36-5, JED-B15
WABCO
TWO SHOT MOULDED VALVE (LARGE BLEED)
897 018 723 4
007
EN
1/1
A2
4:1